

(12) UK Patent Application (19) GB (11) 2 377 268 (13) A

(43) Date of A Publication 08.01.2003

(21) Application No 0116618.0

(22) Date of Filing 07.07.2001

(71) Applicant(s)

Visteon Global Technologies, Inc.
(Incorporated in USA - Michigan)
Suite 728, Parklane Towers East,
One Parklane Boulevard, Dearborn,
Michigan 48126-2490,
United States of America

(72) Inventor(s)

Ian James Rawley
Jayesh Ravat

(74) Agent and/or Address for Service

Dummett Copp
25 The Square, Martlesham Heath,
IPSWICH, Suffolk, IP5 3SL,
United Kingdom

(51) INT CL⁷
F28F 9/02

(52) UK CL (Edition V)
F4S S42A

(56) Documents Cited
DE 019536116 A FR 002785376 A
US 6082447 A

(58) Field of Search
UK CL (Edition S) F4S S42A S8
INT CL⁷ F28F 1/00 9/02
Other: ONLINE DATABASES: WPI, EPODOC, JAPIO

(54) Abstract Title

A heat exchanger with isolated cooling circuits

(57) A heat exchanger (1) with a number of isolated cooling circuits; in particular a heat exchanger unit for an automobile, having a cooling circuit for operating as a condenser for an air conditioning system and a cooling circuit operating as a transmission oil cooler for vehicle transmission. The heat exchanger comprises two manifolds (4,16) which are connected to a heat exchanger core comprising a plurality of tubes (6-13), in which each manifold has a pair of baffles (14,15,17,18) positioned either side of a redundant tube (9), such that two isolated circuits are formed, and the redundant tube does not form part of either circuit.

A hole (23,24) in the manifold wall between the pair of baffles enables leak testing to be performed.


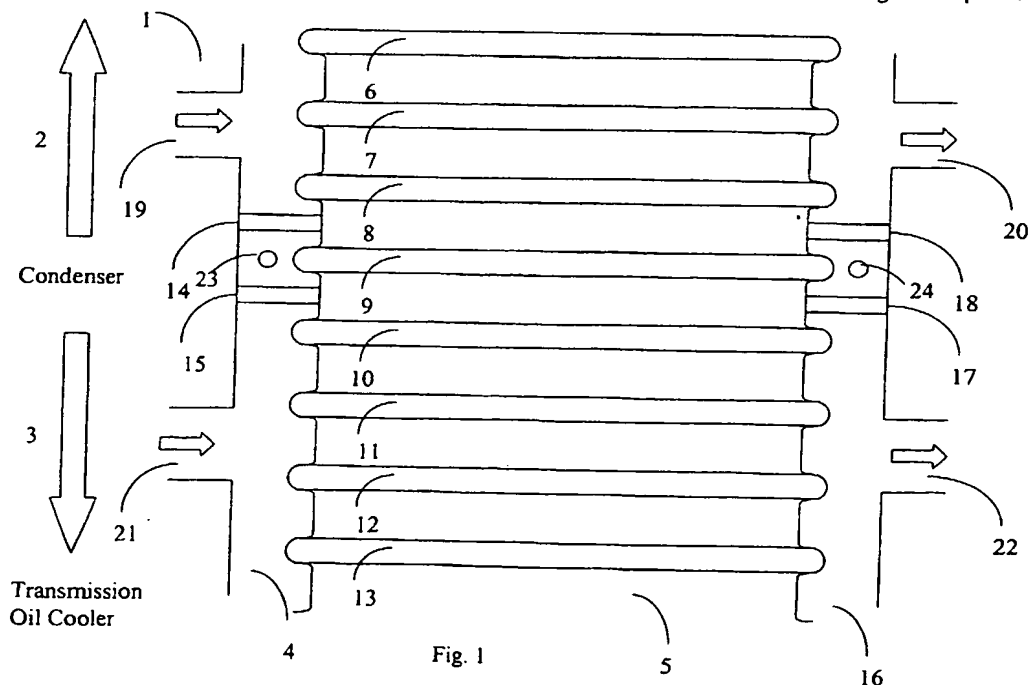


Fig. 1

GB 2 377 268 A

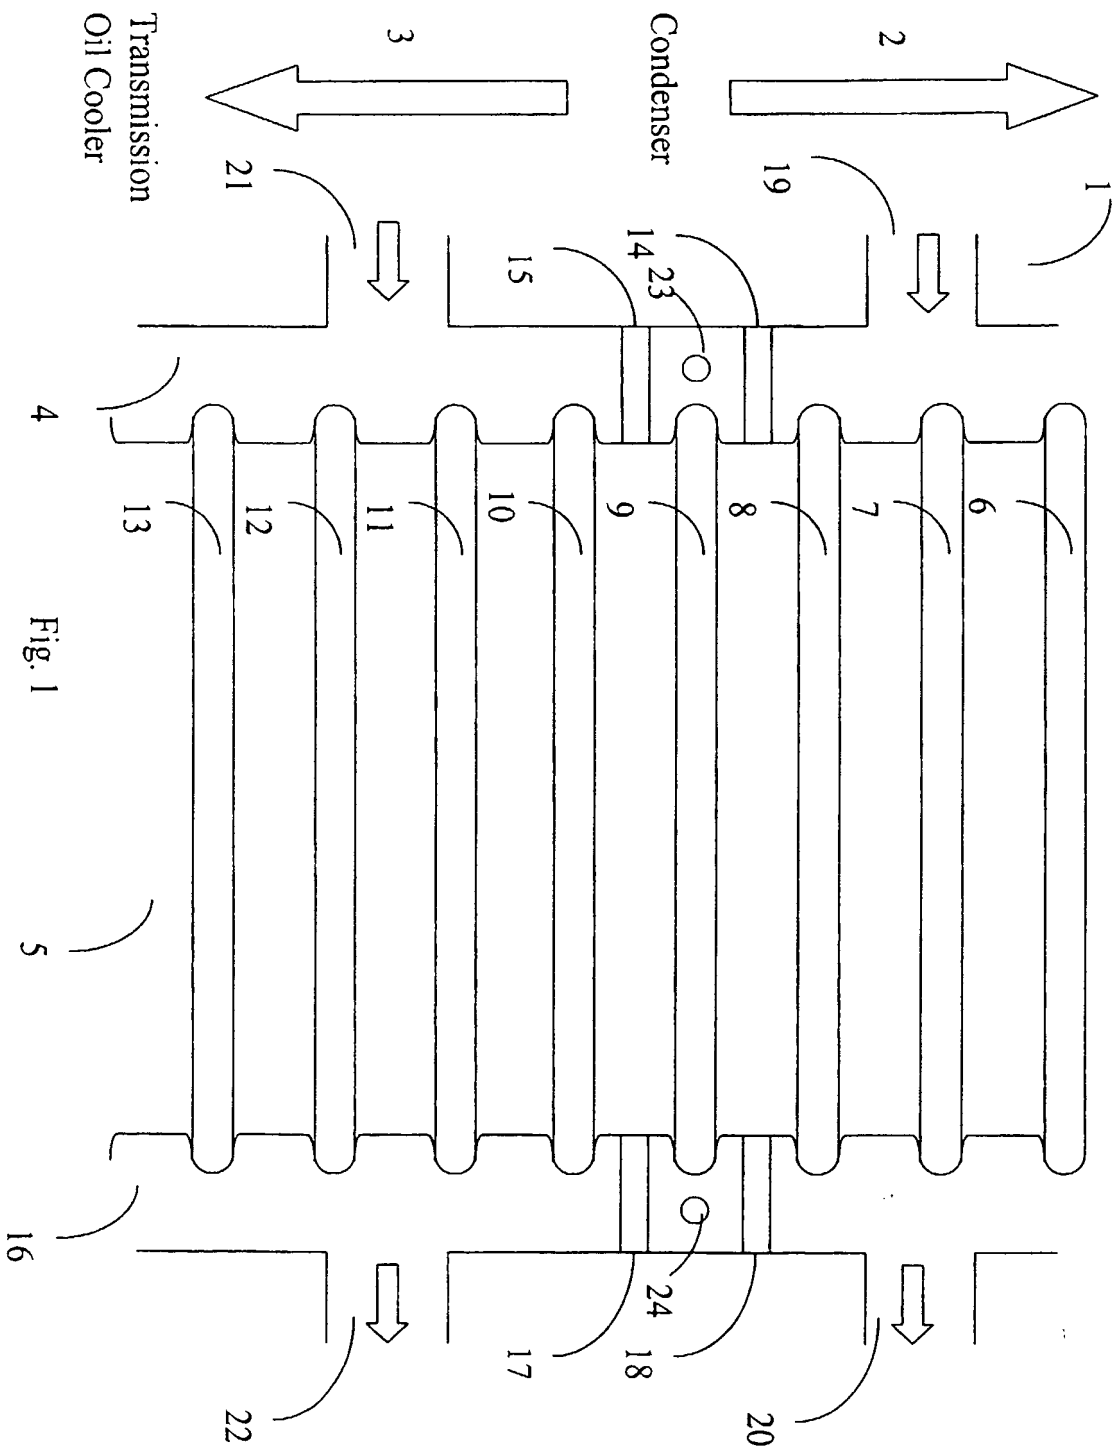

HEAT EXCHANGER

This invention relates to a heat exchanger with a number of isolated cooling circuits. In particular, although not
5 exclusively, a heat exchanger unit for an automobile having a cooling circuit for operating as a condenser for an air conditioning system and a cooling circuit operating as an oil cooler (TOC) for transmission or other systems requiring cooling.

10 Heat exchangers of the type to which this invention relates have manifolds to which a large number of refrigerant/cooling tubes are connected. The refrigerant/cooling tubes usually have fins that are
15 mounted between the tubes, and the tubes and fins together form a heat exchanger core. Fluid in the form of a refrigerant or coolant flows from the manifold through the refrigerant/cooling tubes, and when the fluid passes through the tubes it is in heat exchange relationship with
20 another fluid flowing past the tubes.

In a typical motor vehicle cooling circuit, coolant passes through the vehicle engine and its temperature rises. It then passes through the radiator, entering the radiator
25 through the manifold and then passing through cooling tubes where air flows over the tubes to remove heat from and to reduce the temperature of the coolant before the coolant is re-circulated via a second manifold to the vehicle engine.

30

In a typical air conditioning circuit a refrigerant absorbs heat from the interior passenger compartment via an evaporator. The gaseous refrigerant is then compressed to create a superheated vapour that enters a cooling
5 circuit which acts as a condenser. As the vapour passes through the cooling circuit, heat is removed from the refrigerant by the air flow over the tubes to reduce the temperature of the refrigerant thus condensing the gaseous refrigerant, resulting in high pressure liquid refrigerant
10 leaving the condenser. The liquid refrigerant flows through a pressure relief system, to reduce the pressure of the refrigerant, and continues the air conditioning cycle to provide the required passenger comfort

15 It is known for heat exchangers to have more than one isolated cooling circuit. For example, US 6082447 uses a dual baffle assembly to isolate an air conditioning circuit from an oil cooling circuit. It is an advantage for such heat exchangers to provide a thermal barrier
20 between the two heat exchange circuits. In DE 19536116 a solid rod is used to provide a thermal barrier between two circuits, and in FR 9313893 a shortened tube is similarly used to provide a thermal barrier between cooling circuits.

25

A problem with such known heat exchangers having two cooling circuits is that specially manufactured core assemblies are required in order to provide a thermal barrier between the two circuits.

30

According to the present invention there is provided a

heat exchanger comprising:

two manifolds which are connected to a heat exchanger core comprising a plurality of tubes, in which each manifold has a partition positioned either side of a
5 redundant tube, such that two isolated circuits are formed, and the redundant tube does not form part of either circuit.

10 It is advantageous for leak testing if one manifold has a hole for use during leak testing positioned between the pair of baffles. Preferably each manifold has a hole for use during leak testing positioned between the pair of baffles.

15 In a preferred embodiment of the invention the heat exchanger is provided for use in an automobile in which one of the isolated circuits is a cooling circuit for an air conditioning system and one of the isolated circuits is a transmission oil cooler for a transmission system.

20 In another embodiment the heat exchanger is provided for use in an automobile in which one of the isolated circuits is a refrigerant circuit for an air conditioning system and one of the isolated circuits is an oil cooler for use
25 by a power assisted steering device.

An embodiment of the invention will now be described, by way of example only, with reference to the accompanying
30 drawing in which

Figure 1 illustrates a heat exchanger according to the present invention.

Figure 1 illustrates schematically part of a heat
5 exchanger 1 for an automobile in which has a cooling
circuit 2 for operating as a condenser for an air
conditioning system and a cooling circuit 3 operating as a
transmission oil cooler (TOC) for a transmission system.

10 The heat exchanger 1 comprises a manifold 4 which is
connected to a heat exchanger core 5. The heat exchanger
core 5 comprises a plurality of tubes 6, 7, 8, 9, 10, 11,
12, 13. In the schematic illustration of Figure 1 fins
associated with the tubes are not shown. A pair of baffles
15 14, 15 are positioned either side of tube 9. Similarly, a
second manifold 16 is connected to the heat exchanger core
5. the second manifold 16 also has a pair of baffles 17,
18 positioned either side of the tube 9. Thus tube 9 opens
into the space between each pair of baffles 14, 15 and 17,
20 18.

Air conditioning refrigerant flows into part of the
manifold 4 via inlet 19. The refrigerant flows through
tubes 6, 7, 8 (and other tubes, not shown) where it is
25 cooled by air flowing over the tubes and associated fins.
The refrigerant fluid circuit can take many forms
throughout the heat exchanger, Figure 1. is an example
having a single pass fluid flow. The condensed refrigerant
is then re-circulated to the air conditioning system,
30 passing out of the cooling circuit 2 via part of the
second manifold 16 and outlet 20.

Transmission oil flows into part of the header tank 4 via inlet 21. The oil flows through tubes 10, 11, 12, 13 (and other tubes, not shown) where, in a similar manner to the air conditioning refrigerant, it is cooled by air flowing over the tubes and associated fins. The cooled oil is then re-circulated to the vehicle transmission, passing out of the cooling circuit 3 via part of the second manifold 16 and outlet 22.

10

Redundant tube 9 does not form part of either cooling circuit 2 or 3. Tube 9 serves as a thermal barrier between the air conditioning cooling circuit 2 and the transmission oil cooling circuit 3. It will be appreciated that more than one redundant tube could be used to form a single barrier, and that more than two separate coolant circuits could be created using a second redundant tube elsewhere in the core 5.

20 The manifold 4 has a hole 23 in the space between the baffle 14 and the baffle 15. The hole, together with the baffles 14, 15 and redundant tube 9, serves to aid pressure leak testing. Leak testing is performed by pumping helium into the cooling circuit under test. For example, when cooling circuit 2 is to be tested, helium is pumped into inlet 19, and the heat exchanger 1 is monitored for leaking helium. Any leak across the baffle 14 will be detected by helium leaking through the hole 23. Similarly, when cooling circuit 3 is tested, any leak across the baffle 15 will be detected by helium leaking through the hole 23.

Thus, the twin partition arrangement described, together with a suitably positioned leak testing point (i.e. hole 23), has a testing advantage over single baffle arrangements for provision of twin cooling circuits. Leaks across a single baffle, or dual baffle arrangements where there is no space between the baffles, are extremely difficult to detect as it is inconvenient to provide a suitable leak testing point.

10

In the embodiment of the invention shown in Figure 1 the manifold 16 also has a hole 24 in the space between the baffle 17 and the baffle 18. The hole 24, together with the baffles 17, 18 and redundant tube 9, also serves to aid pressure leak testing, as a leak across either one of the baffles 17, 18, will be detected more readily by detecting a leak via hole 24, although it will be appreciated that such leaks could be detected at hole 23, as the testing gas would flow through hole 23 via redundant tube 9.

20

CLAIMS

1. A heat exchanger comprising:

two manifolds which are connected to a heat exchanger
5 core comprising a plurality of tubes, in which each
manifold has a pair of baffles positioned either side of a
redundant tube, such that two isolated circuits are
formed, and the redundant tube does not form part of
either circuit.

10

2. A heat exchanger according to claim 1 in which one
manifold has a hole for use during leak testing positioned
between the pair of baffles.

15

3. A heat exchanger according to claim 2 in which each
manifold has a hole for use during leak testing positioned
between the pair of baffles.

20

4. A heat exchanger according to any one of the
preceding claims for use in an automobile in which one of
the isolated circuits is a cooling circuit for an air
25 conditioning system and one of the isolated circuits is a
transmission oil cooler for an engine oil system.

5. A heat exchanger according to any one of the
30 preceding claims for use in an automobile in which one of
the isolated circuits is a cooling circuit for an air

conditioning system and one of the isolated circuits is an oil cooler for use by a power assisted steering device.

- 5 6. A heat exchanger substantially as herein described with reference to the accompanying drawing.



INVESTOR IN PEOPLE

Application No: GB 0116618.0
Claims searched: All

Examiner: Rosalind Lyon
Date of search: 23 October 2001

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.S): F4S (S8, S42A, S42Z)

Int Cl (Ed.7): F28F 1/00, 9/02

Other: Online Databases: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage		Relevant to claims
Y	US6082447	NORSK HYDRO AS Fig 1 and p 4, col. 3 lines 57-67 to col. 4 lines 1-3. Describes double baffle method for leak testing.	2,3
X	DE19536116A1	BEHR GMBH&CO See especially figs 1 and 2, p 3, lines 40-47. Partition member 11 acts to separate two heat exchanger circuits	1 at least
Y			2,3
Y	FR2785376	VALEO THERMIQUE MOTEUR See especially figs 1 to 4. Describes two heat exchanger circuits separated by an inactive tube.	1

X Document indicating lack of novelty or inventive step
Y Document indicating lack of inventive step if combined with one or more other documents of same category.

& Member of the same patent family

A Document indicating technological background and/or state of the art.
P Document published on or after the declared priority date but before the filing date of this invention.
E Patent document published on or after, but with priority date earlier than, the filing date of this application.

THIS PAGE BLANK (USPTO)